

AREA STATEMENT	
LOADING & UNLOADING AREA	= 04x00 = (7.83 X 2.54) + (6.00 X 18.74) = 19.88 + 112.44 = 132.32 SQ.M
DRY STORAGE ROOM	= 3.80 X 5.21 = 19.79 SQ.M.
INCHARGE ROOM	= 4.27 X 3.00 = 12.81 SQ.M.
CONTROL ROOM	= 5.57 X 2.27 = 12.64 SQ.M.
ELECTRICAL ROOM	= 3.80 X 5.21 = 19.79 SQ.M.
W.L.C / W.L.F.	= X + Y + Z = 240.36 SQ.M. X = 13.10 X 6.60 = 86.46 SQ.M. Y = 13.10 X 6.60 = 86.46 SQ.M. Z = 7.87 X 8.57 = 67.44 SQ.M.
PACKAGING AREA	= 10.98 X 6.06 = 66.53 SQ.M.
CHANGE ROOM	= 3.00 X 2.27 = 6.81 SQ.M.
TOTAL AREA	= 511.05 SQ.M.

- NOTES:
1. This drawing is copyright.
 2. This drawing should not be reproduced or handed over to third party without consent of competent authority.
 3. Do not scale from this drawing.
 4. All dimensions are in millimetres unless noted otherwise.
 5. These drawings are only indicative and not to be used for construction on site.
 6. Do not make any structural changes on site. The same are not recommended.

S.NO.	REVISION (READ DOWNWARD)	DATE
1.		
2.		
1.	FOR TENDER	18-01-10
S.NO.	ISSUED TO (READ UPWARD)	DATE

PROJECT

UPGRADATION OF COLD CHAIN FACILITIES IN THE GOVERNMENT MEDICAL STORE DEPOTS AT DELHI KARNAL, HYDERABAD, MUMBAI, CHENNAI KOLKATA & GUWAHATI.


FLOOR PLAN & DETAILS (CHENNAI)	SCALE
	JAN'2010
TITLE	
DATE	

OWNER:-

ARCHITECT:-

AR DWG.NO.: GMSD/CHE/AR/01
DEALT BY:

ARCHITECT :
SURINDER SAWHNEY ASSOCIATES
ARCHITECTS & DESIGN CONSULTANTS
571, SECTOR-18-B, CHANDIGARH
E-MAIL: surindersawhney@sify.com
PH:0172-2780535, FAX : 0172-2726627.

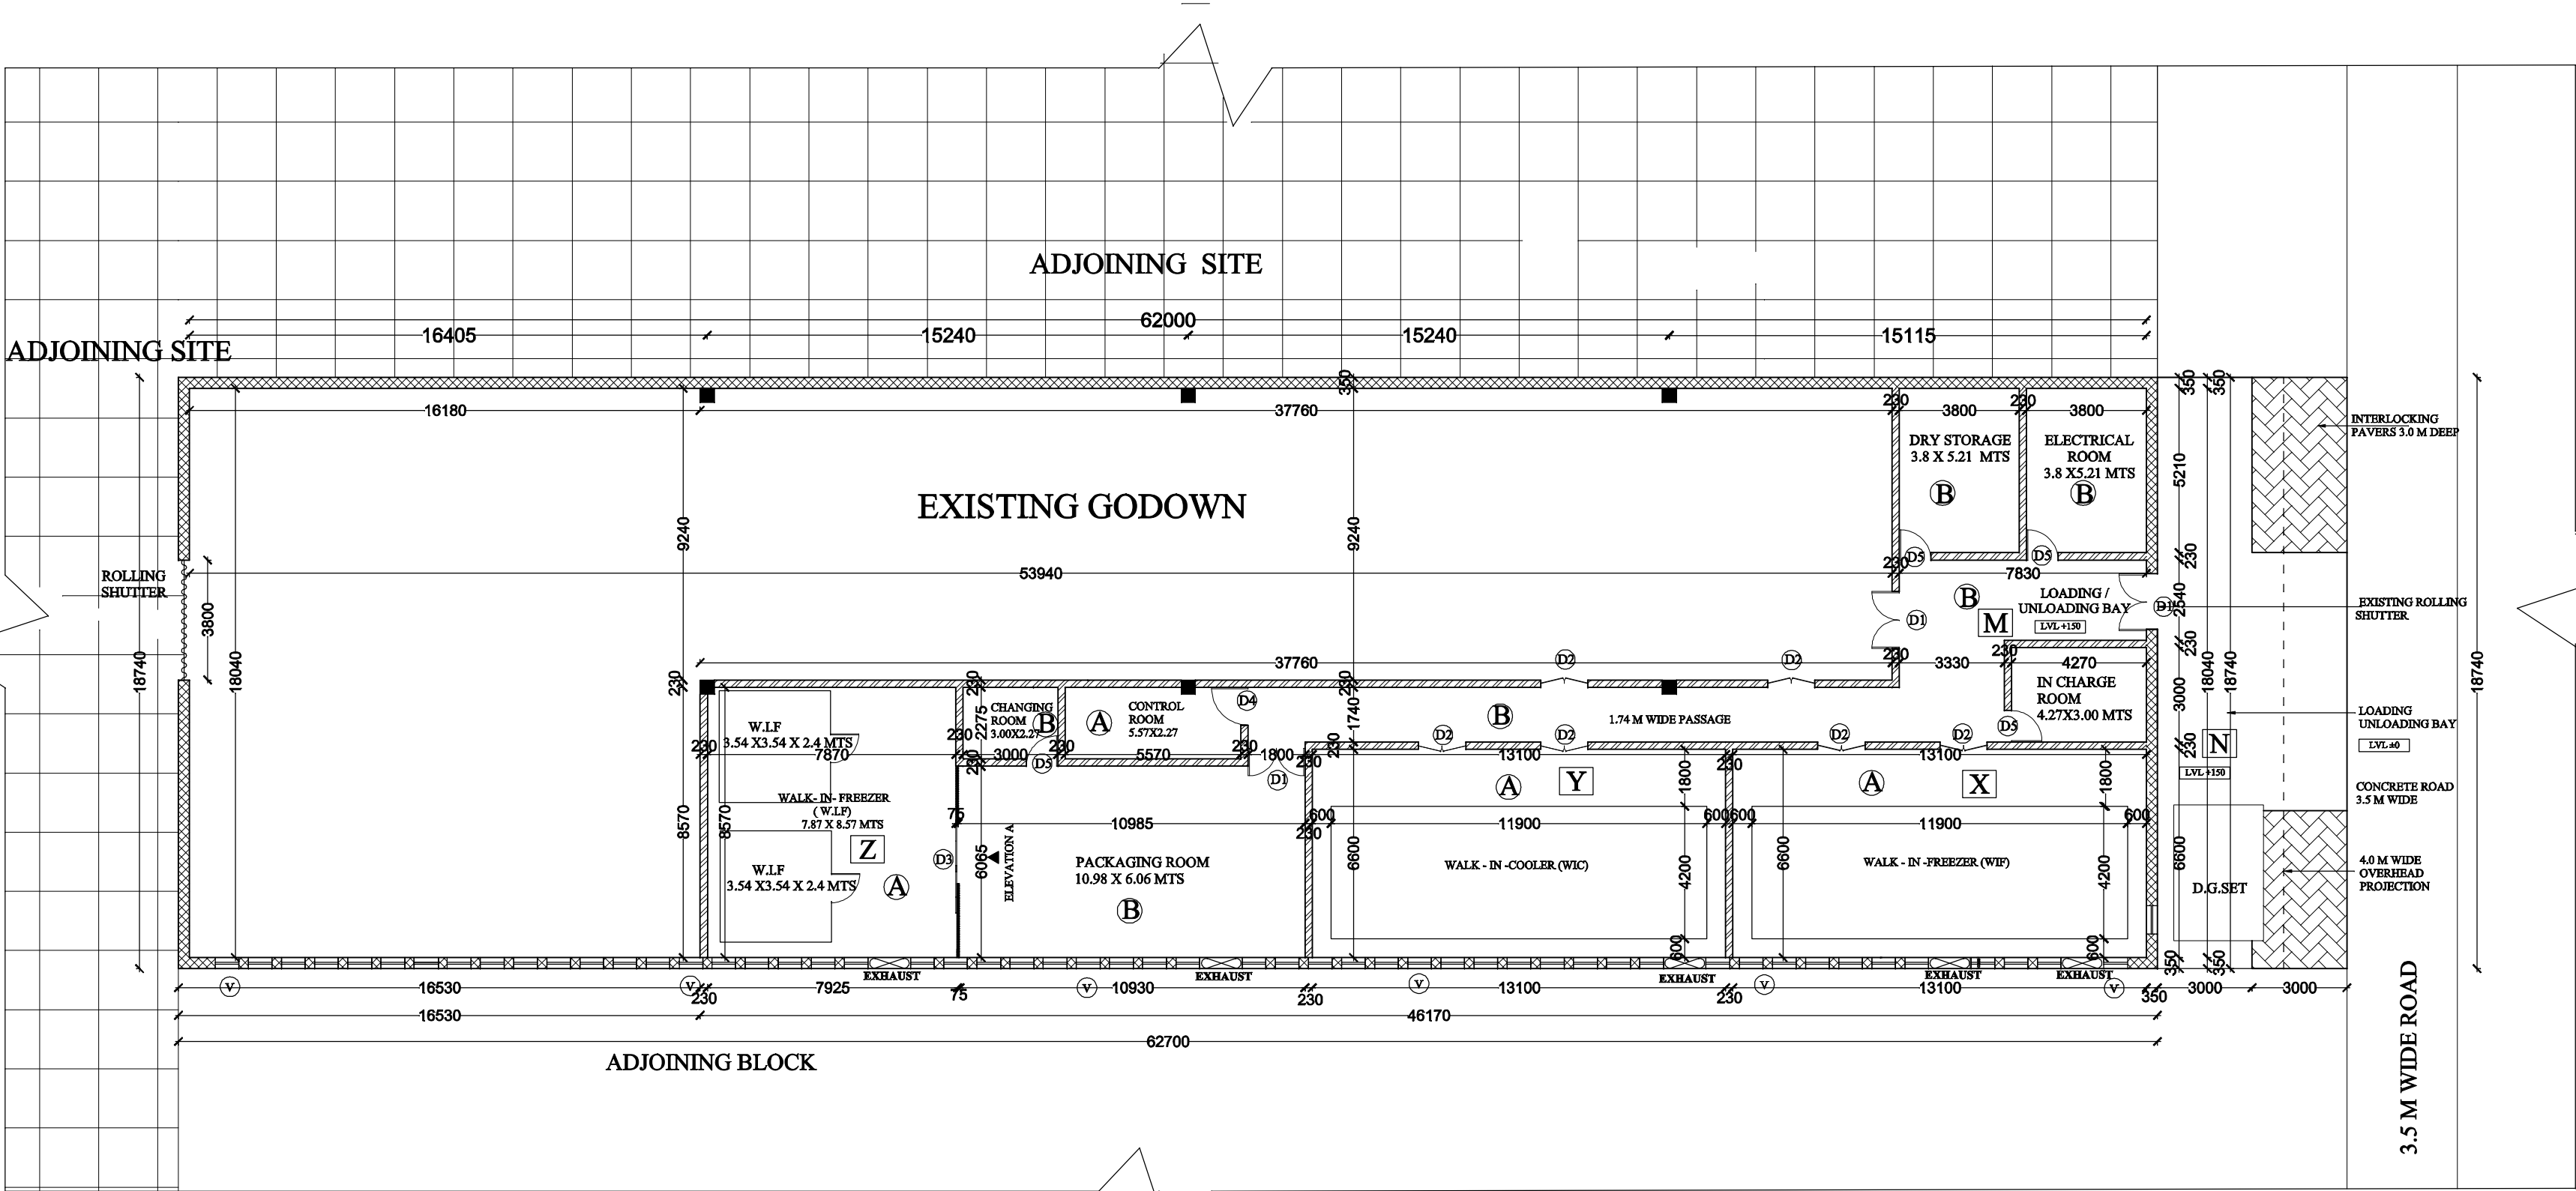

FLOOR PLAN

PROPOSED ACTIVITY CHART

LOADING & UNLOADING AREA	= 132.32 SQ.M
DRY STORAGE ROOM	= 19.79 SQ.M.
INCHARGE ROOM	= 12.81 SQ.M.
CONTROL ROOM	= 12.64 SQ.M.
ELECTRICAL ROOM	= 19.79 SQ.M
W.I.C / W.I.F.	= 240.36 SQ.M.
PACKAGING AREA	= 66.53 SQ.M.
CHANGE ROOM	= 6.81 SQ.M.
TOTAL AREA	= 511.05 SQ.M.

DOOR/ WINDOW SCHEDULE

S.NO	NAME OF DOOR	DOOR TYPE	WIDTH	HEIGHT	NO'S
1	D1	DOUBLE HINGED	1.8 MTS	2.4 MTS	3
2	D2	DOUBLE HINGED	1.5 MTS	2.4 MTS	6
3	D3	SLIDING	1.8 MTS	2.4 MTS	1
4	D4	HINGED	1.2 MTS	2.1 MTS	1
5	D5	HINGED	1 MTS	2.1 MTS	4

FLOORING/CEILING SPECIFICATIONS

A	WIC/ WIF	600 X 600 MM ANTISKID VITRIFIED TILES
	CONTROL ROOM	METALLIC FALSE CEILING PANELS
B	PACKAGING AREA	KOTA STONE FLOORING
	ELECTRICAL ROOM DRY STORAGE CHANGE ROOM PASSAGE LOADING & UNLOADING	METALLIC FALSE CEILING PANELS KOTA STONE FLOORING
C	INTERLOCKING PAVERS	
D	3.5 M WIDE ROAD	CONCRETE ROAD